

Q/GDW


1
2
3
4
5
6
7
8
9

A
B
C
D
E


1
1
1
1
3
4
7
8
8
9
11
13
19
28
32

“

”

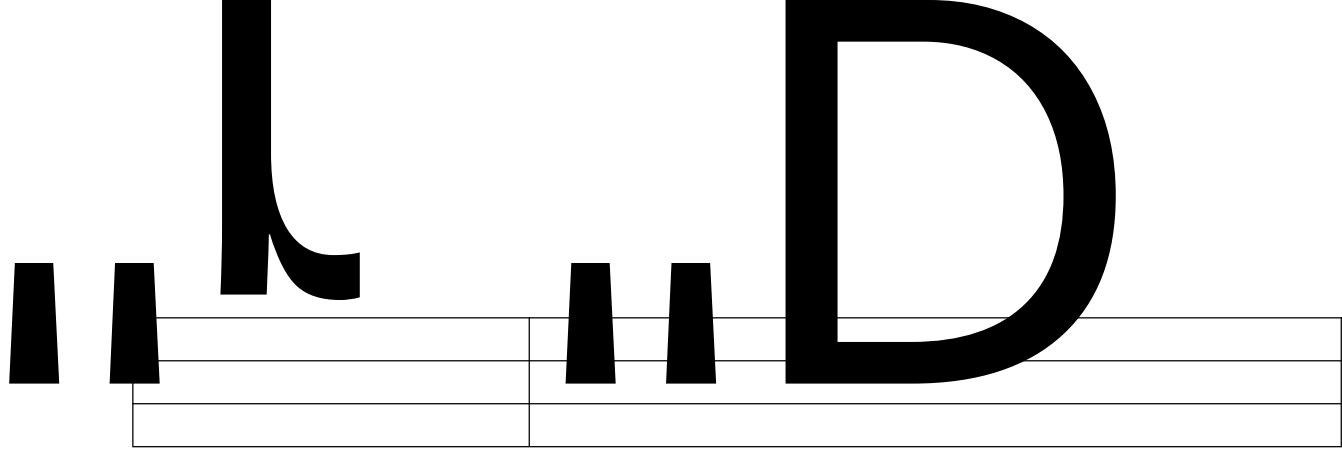

2 đ



ž - " ypĐQP

A.1

A.2

A.3

A.4

A

B.1

B.2

C.1

					m ²
1				(0~20000)N, ≥ 5kHz, 2.5 $5_0^{+0.01}$ kg 48mm 45#	≥ 15
				45# , $3_0^{+0.05}$ kg, : 60 ° , 0.5mm, 40mm, 28mm, HRC45	
2				20kN, ≥ 800mm 1.0	≥ 15
3				20kN, ≥ 800mm 1.0	
4				20kN, ≥ 800mm 1.0	
5				\	\

							m ²
6				20kN	≥ 800mm	1.0	≥ 15
7				20kN	≥ 800mm	1.0	
8				≥ 50mΩ	1	≥ 30A	≥ 15

C.2

m²

							m ²
3	330kV	1	DL/T 740	500kV	1	≥ 300	20m
				1500kV	1		
4		1	DL/T 971	50kV	1		
				100kV	1		
5	35kV	1		≥ 50mΩ	1	≥ 30A	
					r		
				100kV	1		
6	66kV~220kV			≥ 50mΩ	1	≥ 30A	

					m ²
8	() 35kV		1		
				150kV 1	
9	() 66kV~220kV		1		
				500kV 1	
10	() 330kV		1		
				1500kV 1	
				1000kV 1	
11				0.5m	≥ 50
				150kV 1	
12				50kV 1	≥ 30
				DL/T 1476	
13				100kV 1	

C.3

					m ²
1				50kV 1	≥ 30
			1		
				50kV 1	
				30mA 1	
2				50kV 1	
			1		
				50kV 1	
				30mA 1	
			1		
3				50kV 1	≥ 30
				DL/T1476	


C.4


					m ²
1				5kN, 1 , AC220V	≥ 15
2				5kN, 1 , AC220V	
3				5kN, 1 , AC220V	
4				300kN/20kN 15m , 1.2m 1.0	
5				5kN, 1 , AC220V	
				(5Kg/10kg, 3%, 300kg)	
6				5kN, 1 , AC220V	
				(5Kg/10kg, 3%, 300kg)	
				1T	


D.1


D.2- D.7


D.1

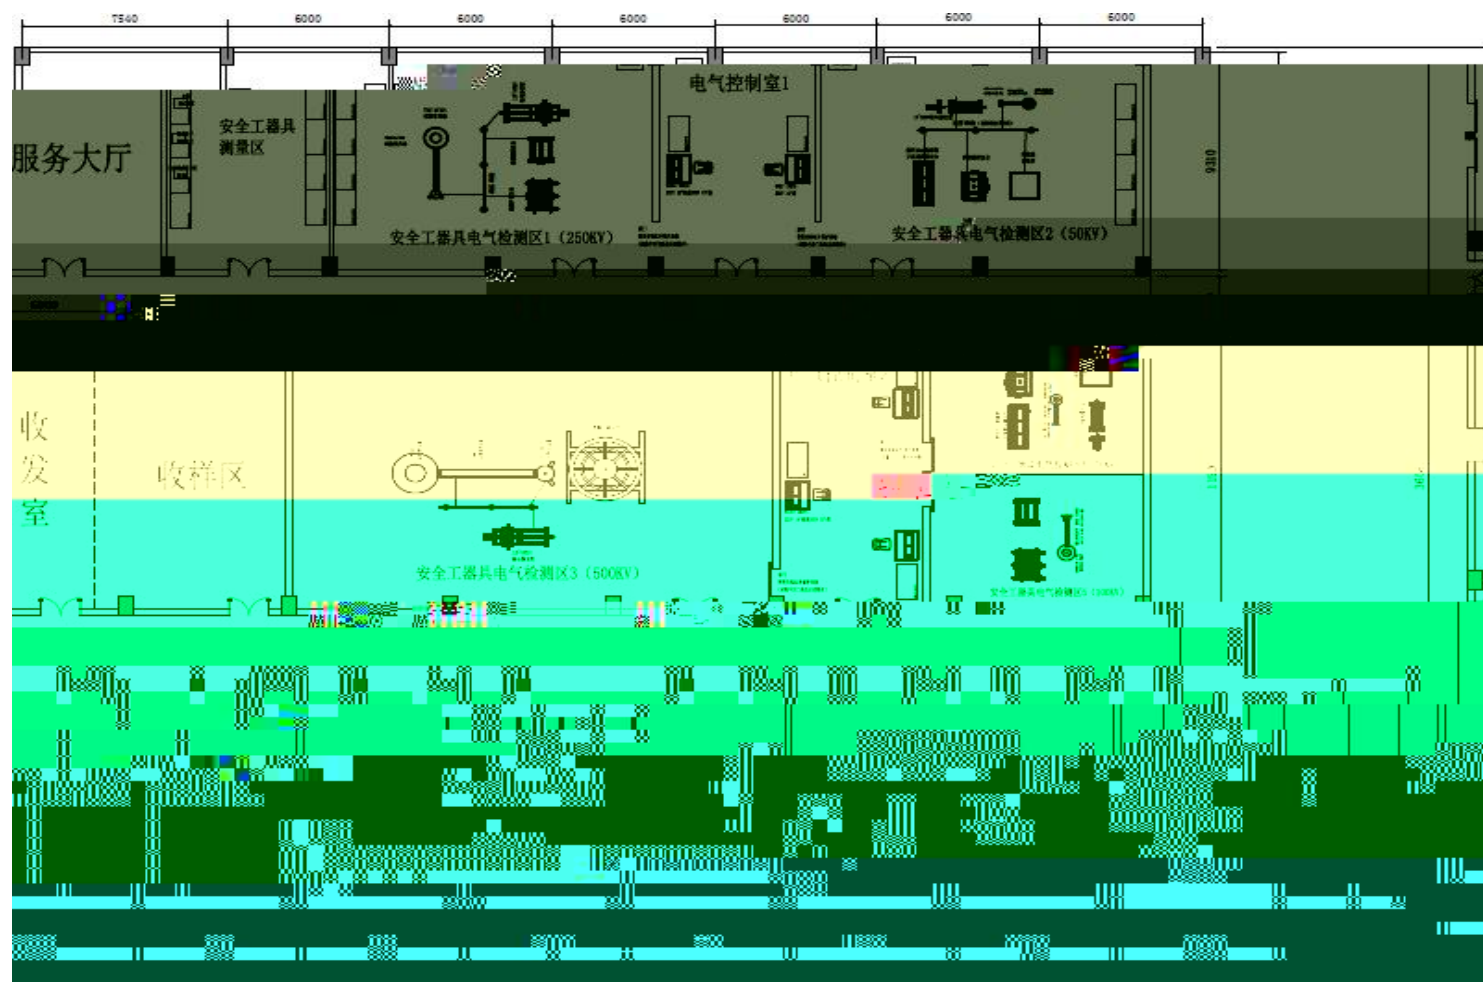


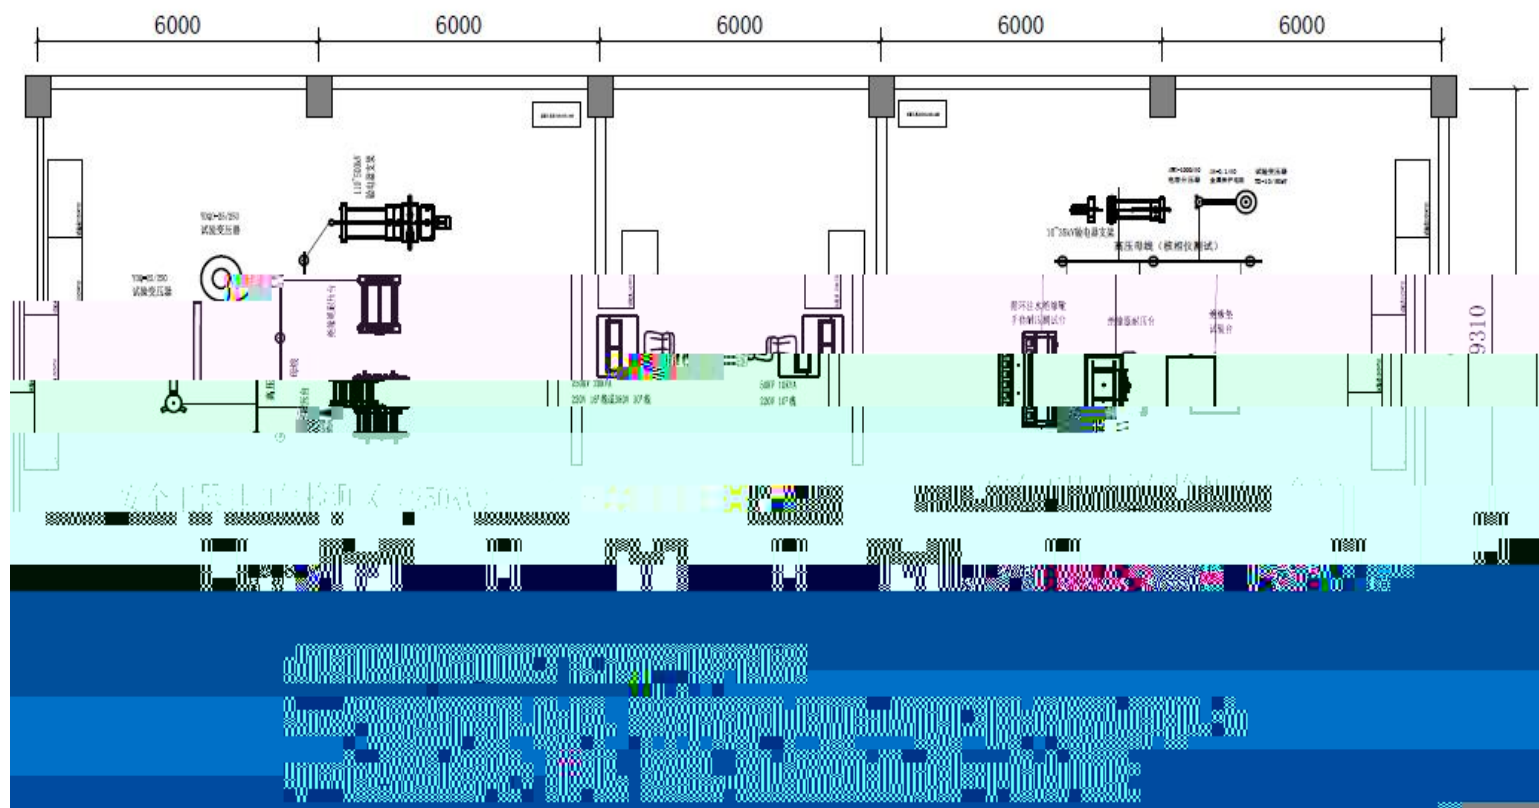


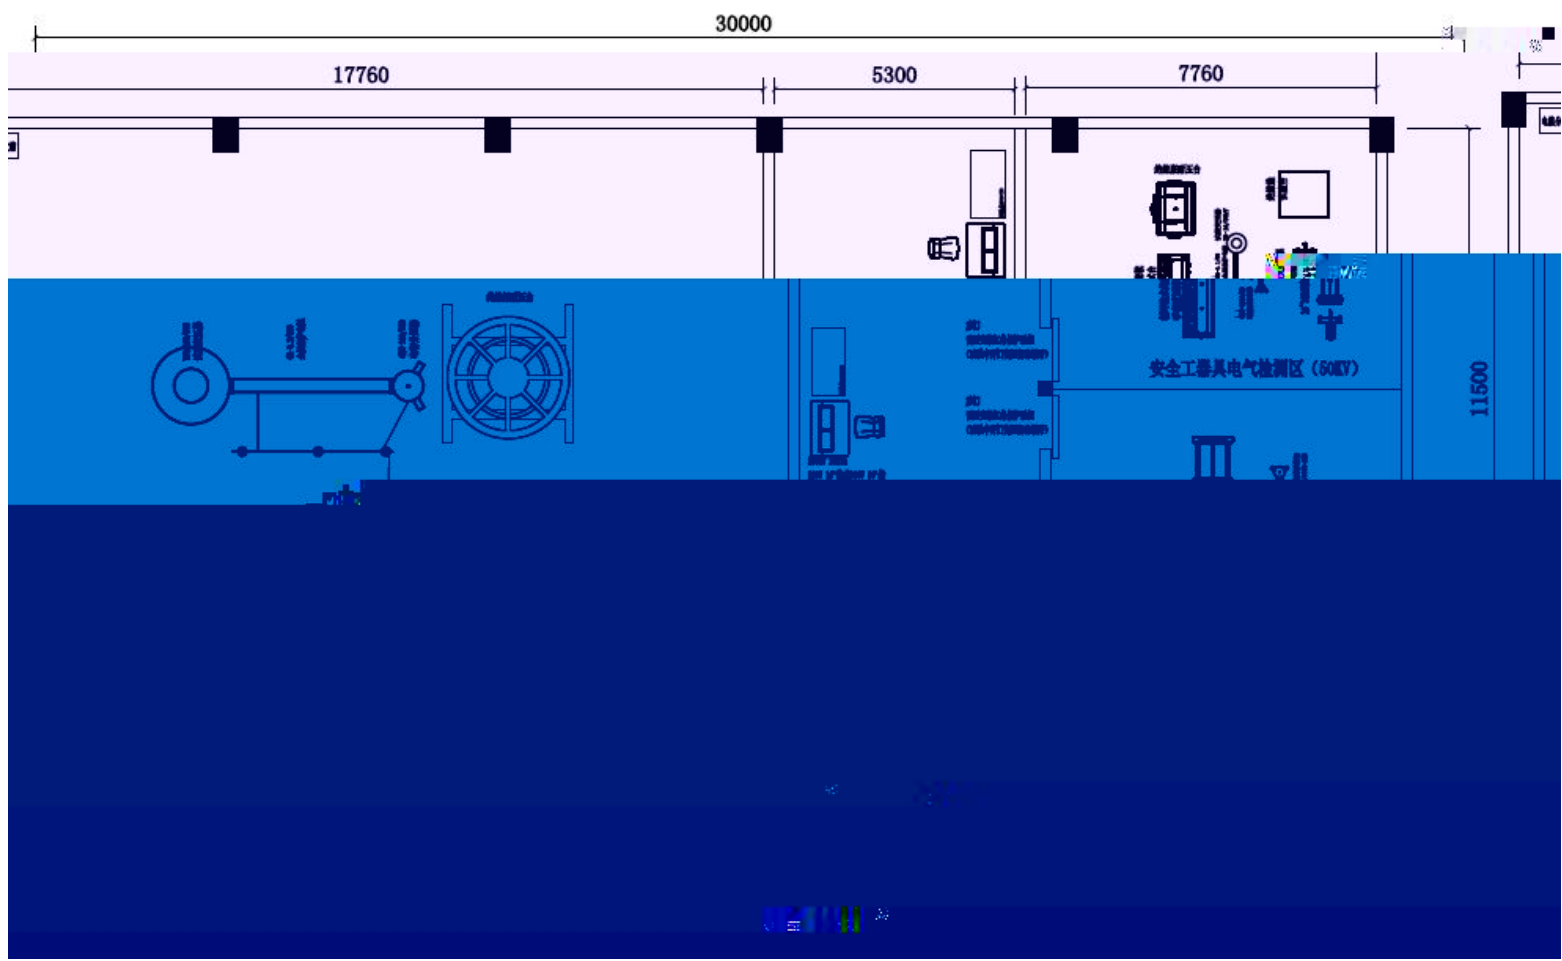


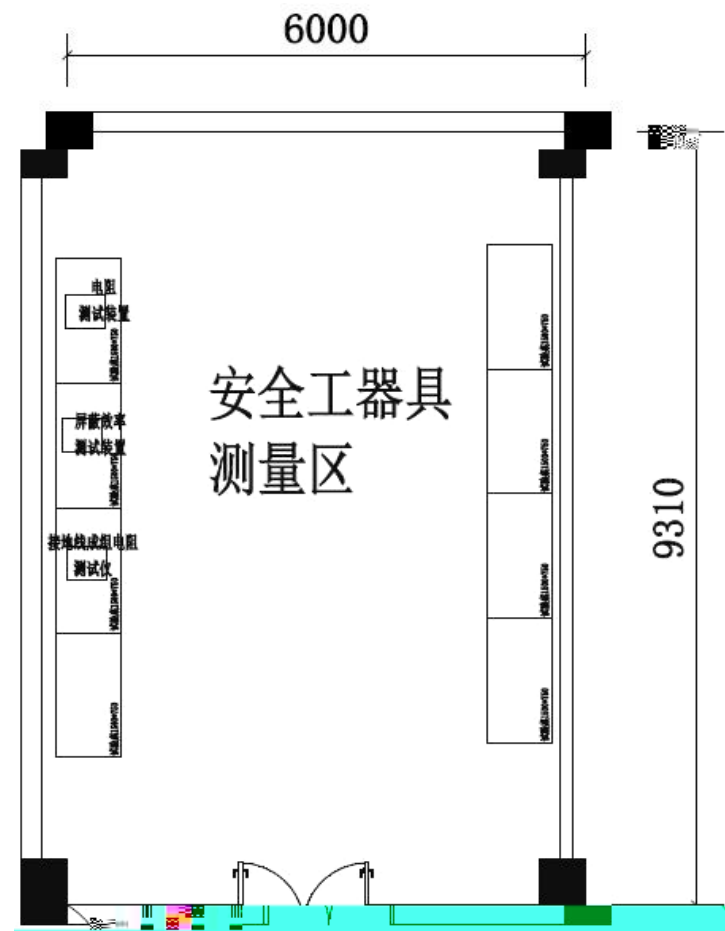

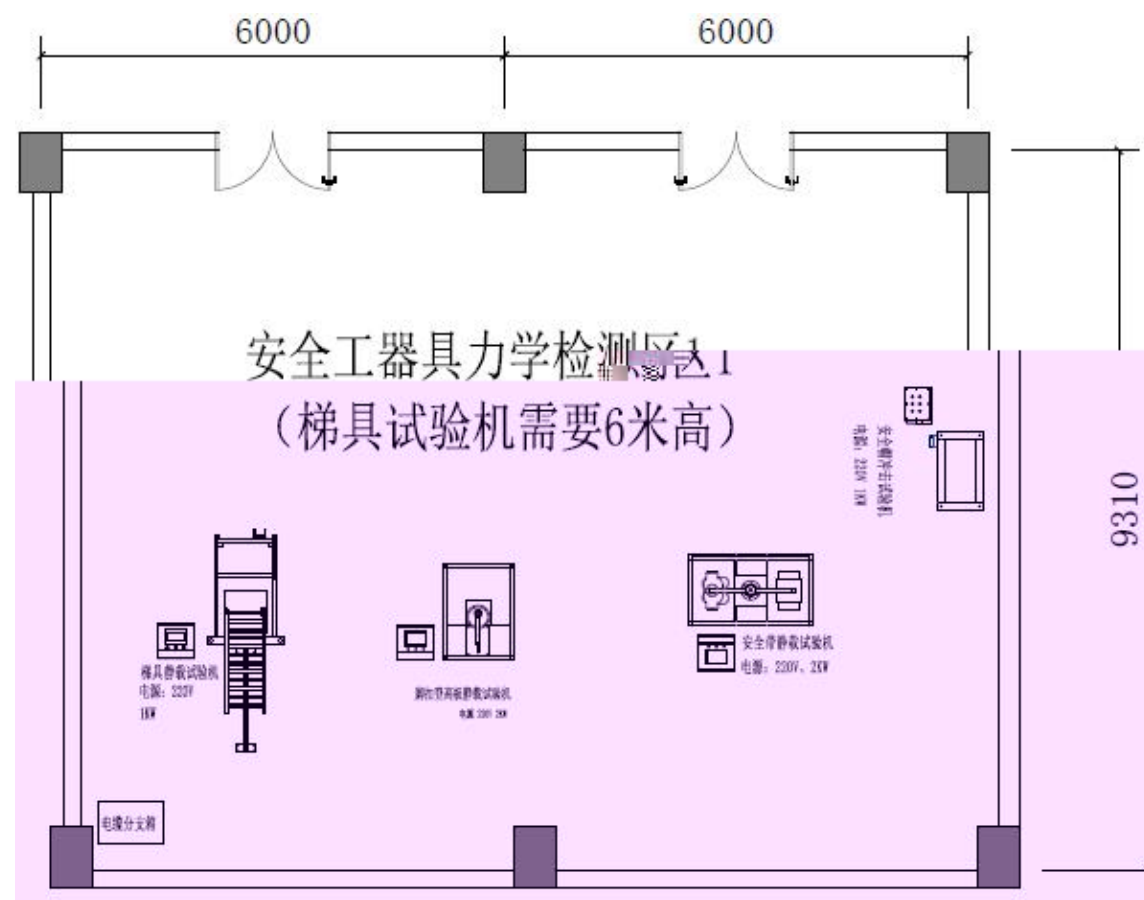


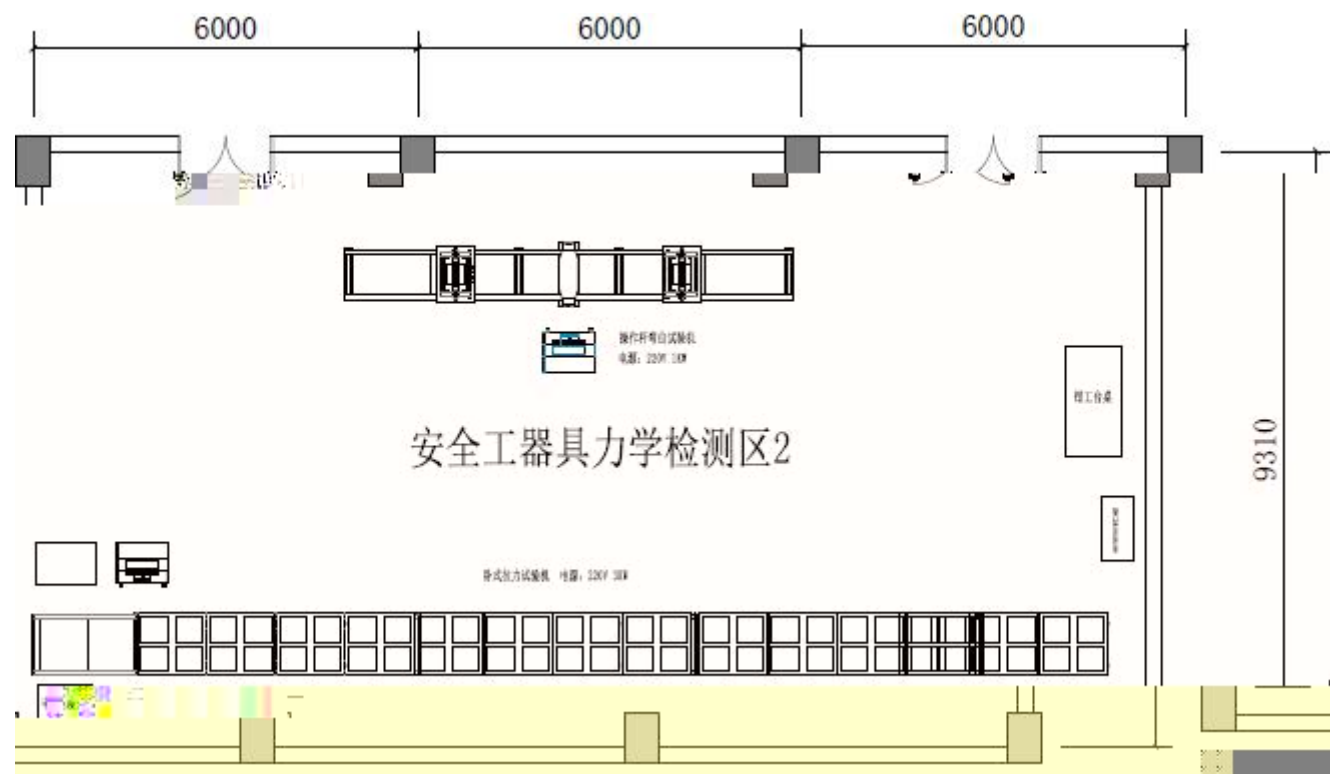

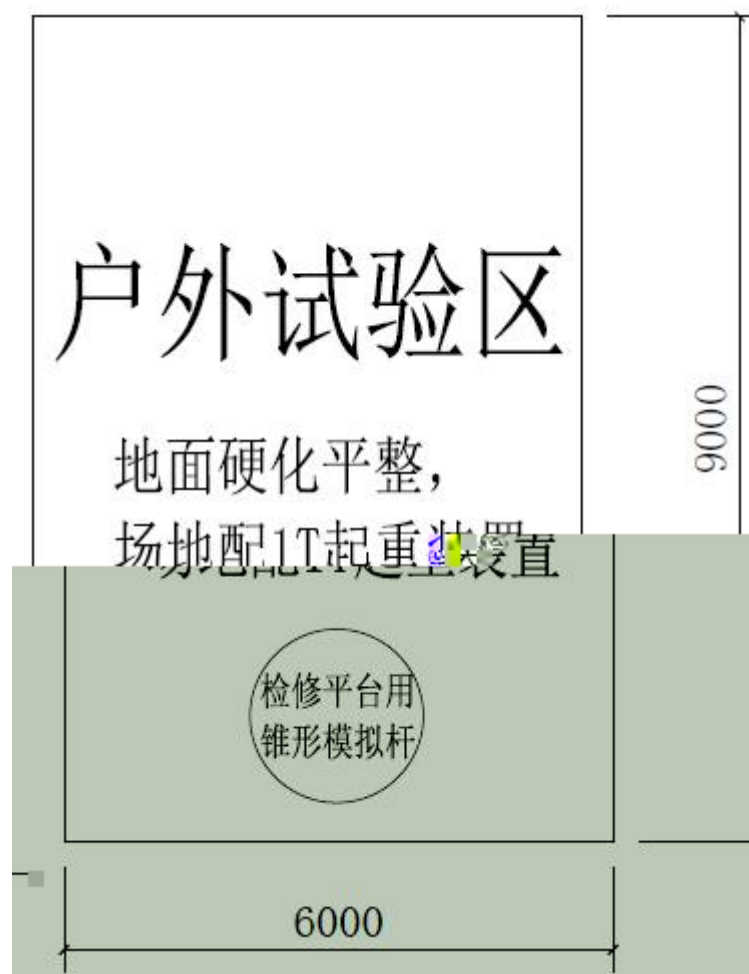

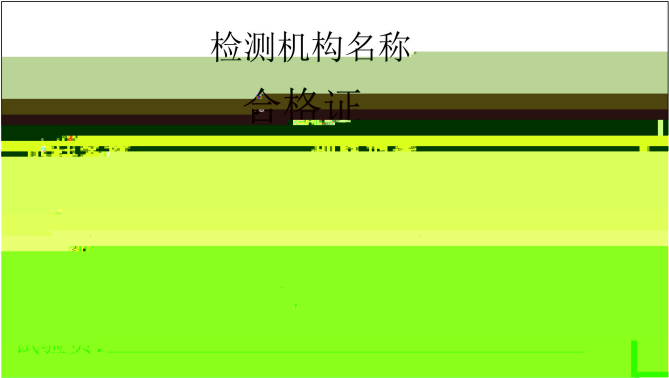

E.2-E.4

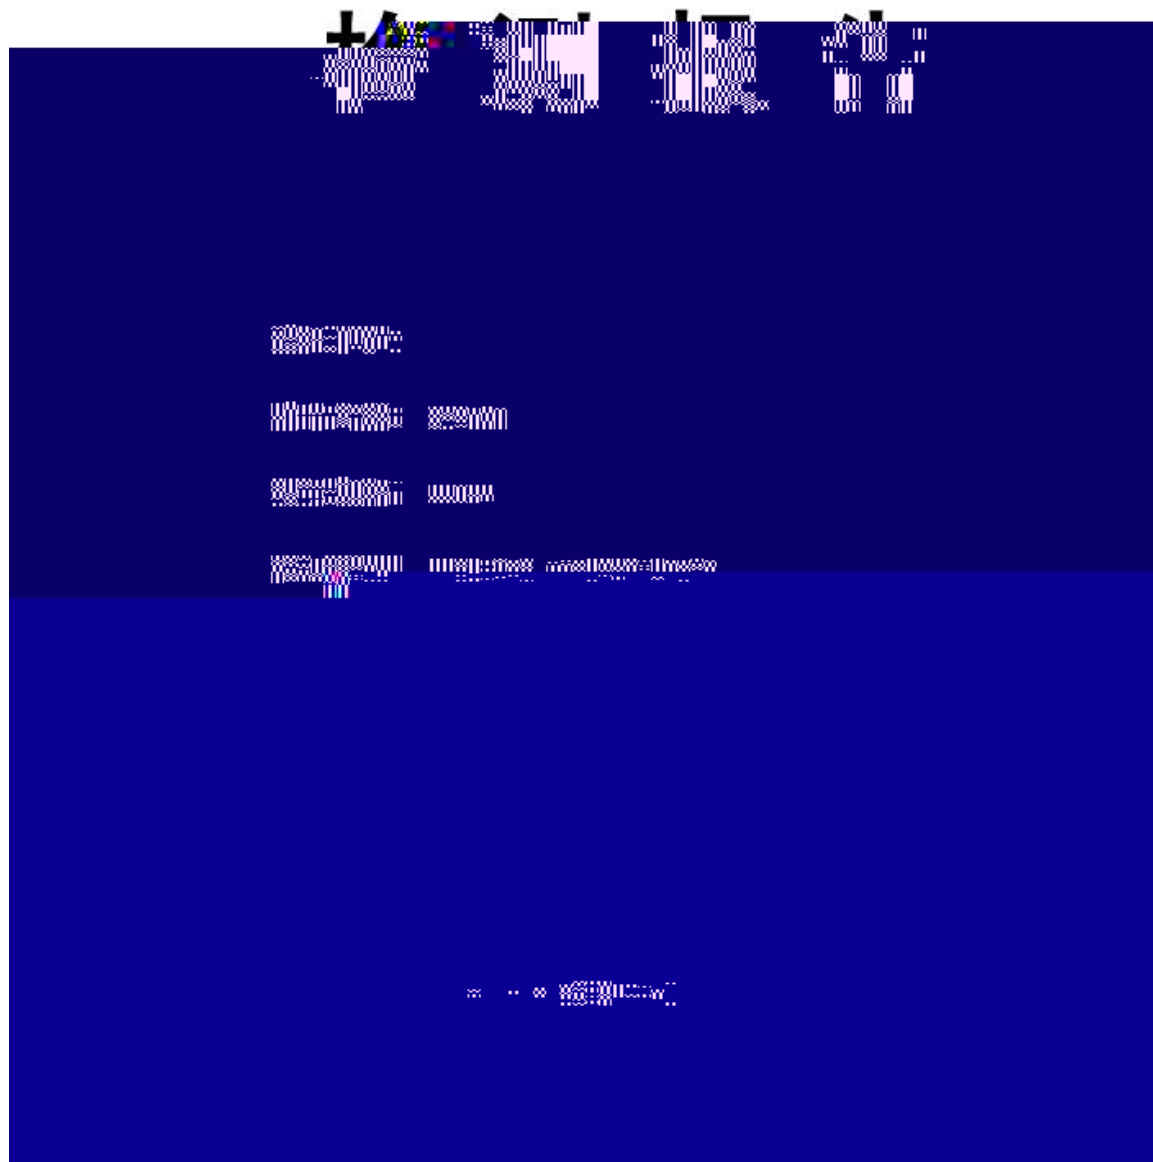

检测结果

序号	检测项目	标准要求	检测结果	评价
1	绝缘杆 工频耐压试验	试验长度：2.1m； 试验时间：1min； 试验电压：440kV		

报告正文

绝缘

1	34
2	34
3	34
4	34
5	34
6	35

“ ”

√